

**PRISMATIC SHAPE**

MODEL	CROSS REFERENCE	VOLTAGE	CAPACITY	DIMENSIONS (INCH)
BL-4PN	LTC-3PN	3.6V	400mAh	0.60"x0.65"x0.25"
BL-4PN-S2	LTC-3PN-S2	3.6V	400mAh	0.60"x0.65"x0.25"
BL-4PN-S4	LTC-3PN-S4	3.6V	400mAh	0.60"x0.65"x0.25"



- High energy density and voltage.
- Low profile, prismatic design.
- Stainless steel constructed, hermetically sealed.
- Performance of consistency and stability.
- Low self discharge rate, long shelf life.

**ELECTRICAL CHARACTERISTICS**


Nominal Capacity -----	400mAh
Rated Voltage -----	3.6V
Continuous Current -----	5mA
Pulse Current Capacity -----	20mA
Operating Temperature -----	-55°C/+85°C
Typical Weight -----	5.0g
Storage (Recommended) -----	+30°C Max.
(Possible without leakage)	-55°C/+120°C

Power leads and support pins are solder tinned.  
Case negative polarity.


**BL-4PN**

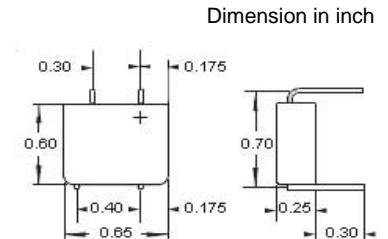

**BL-4PN-S2**




**BL-4PN-S4**




Customized pin configurations are available upon request.

**Discharge Characteristics @25°C**

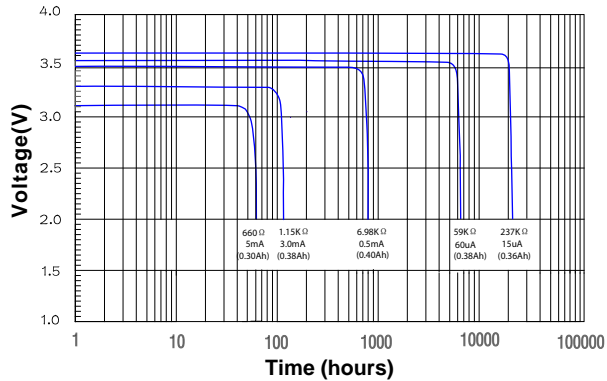

**Voltage versus Temperature**

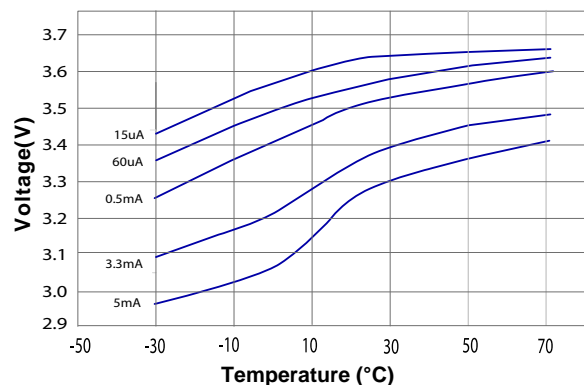

**Capacity versus Current**

