




- Auto-reset PTC protection
- Power status LED (green)
- Attractive designer white housing
- Output power 40VA and 50VA series
- Heavy polyurethane insulated copper windings
- Single voltage primary and secondary
- PTC (positive temperature coefficient)
- Input voltage 120VAC, 60Hz
- Dimensions (mm): 2.63W x 2.38D x 3.20H
(66.7 x 60.3 x 81.3)

Amseco transformers are specially designed for low voltage applications. The transformers are equipped with internal electrical overload protection and current fuses to meet UL requirements. Amseco products are built with quality components and provide high performance and long durability.

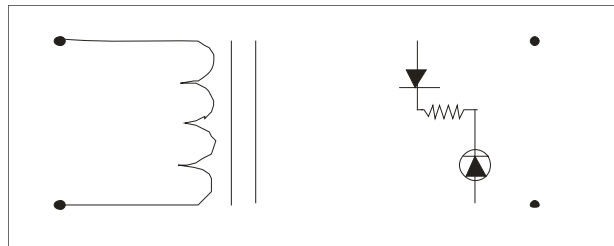

Model Number	Stock Number	Input Voltage (VAC)	Output Voltage (VAC)	Power Rating (VA)	Rated Secondary Current (A)	Max. Operating Temperature	Protection Device			Status Power Indicator
							Primary	Secondary	Type	
XR-1240LED	4240001	120	12	40	3.33	266°F	-	4A 30V	PTC	Green LED
XR-1640LED	4240003	120	16	40	2.42	266°F	-	4A 30V	PTC	Green LED
XR-1840LED	4240005	120	18	40	2.22	266°F	-	4A 30V	PTC	Green LED
XR-2440LED	4240007	120	24	40	1.66	266°F	-	3A 30V	PTC	Green LED
XR-1250LED	4240002	120	12	50	4.16	266°F	-	5A 30V	PTC	Green LED
XR-1650LED	4240004	120	16	50	3.03	266°F	-	4A 30V	PTC	Green LED
XR-1850LED	4240006	120	18	50	2.77	266°F	-	4A 30V	PTC	Green LED
XR-2450LED	4240008	120	24	50	2.08	266°F	-	3A 30V	PTC	Green LED

Distributed By: The Power Source, Inc. (800) 847-6947 www.The-PowerSource.com